



(19) World organization for intellectual property PCT
International Office

(10) International publication number
WO 2005/050047 A1

(43) International publication date June 2,
2005 (06-02-2005)

(51) International patent classification⁷: **F16D 33/02**

(21) International file number: **PCT/EP2004/012701**

(22) International Application date:
November 10, 2004 (11-10-2004)

(25) Application language: German

(26) Publication language: German

(30) Specifications concerning priority:
103 53 517.9 November 14, 2003 (11-14-2003) DE

(71) Applicant (for all destination countries with exception
of US): **VOITH TURBO GMBH & CO. KG** [DE/DE];
Alexanderstrasse 2, 89522 Heidenheim (DE).

(72) Inventor; and

(75) Inventor/Applicant (only for the US): **MENNE,**
Achim


[DE/DE]; Am Ebenrain 4, 74564 Crailsheim (DE).
HOELLER, Heinz [DE/DE]; W. v. Ketteier Strasse 29,
74564 Crailsheim (DE).

(74) Attorney: **WEITZEL & PARTNER**; Friedenstrasse 10,
89522 Heidenheim (DE).

(81) Designated countries (as far as is not indicated otherwise,
for each available type of national patent): AE, AG, AL,
AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH,
CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES,
FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

[continuation on the following page]

(54) Title:

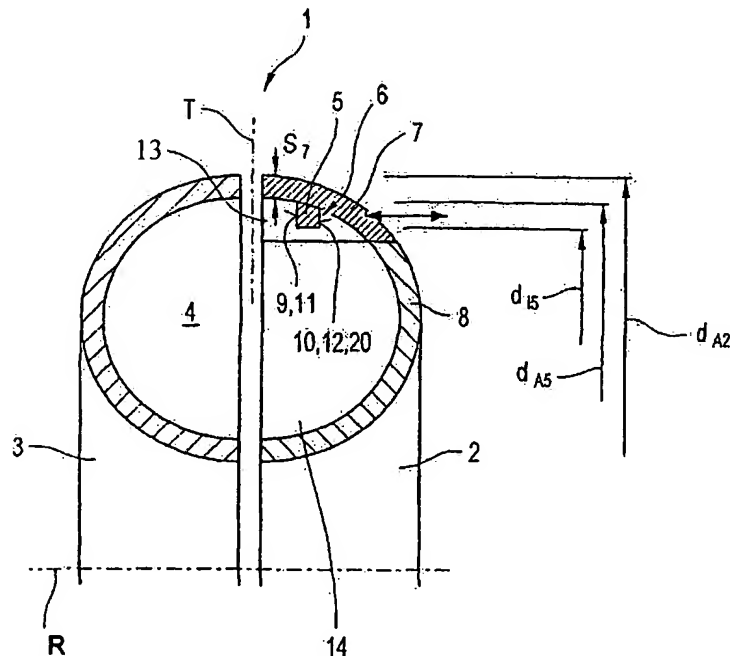

(57) Abstract: The invention relates to a hydrodynamic clutch which comprises a primary impeller (2) and a secondary impeller (3) which together define a working chamber (4). The clutch also comprises means for influencing the transmission behavior of the hydrodynamic clutch, especially for influencing the circulation flow in the working chamber (4), said means comprising at least one baffle plate (5) that extends at least partially into the working chamber (4). The inventive clutch is characterized in that the baffle plate can be displaced in the axial direction relative to the working chamber.

[continuation on the following page]

(84) **Designated countries** (as far as is not indicated otherwise, for each available type of regional patent): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), eurasisches (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), europäisches (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *for the termination for changes of the claims applying deadline; publication is repeated in the event that changes occur*

For the explanation of the two character codes and the other abbreviations reference is made to the explanations ("Guidance Notes on Codes and Abbreviations") at the beginning of each regular edition of the PCT journal.

Published:

— *with international search report*